


Light Emitting Diodes

Object: We study the characteristics of light emitting diodes and use them to demonstrate the quantum nature of light $E=hf$. Planck's constant $h = 4.13 \times 10^{-15}$ eV/s is determined by measuring the diffusion voltage vs. light emission.

P-n Junction: P-material contains excess +holes and n-material contain excess -electrons. Upon joining p-side holes diffuse across the junction to the right and n-side electrons diffuse across the junction to the left until electrostatic equilibrium is reached. A contact potential difference U_0 (diffusion voltage) is developed across the junction corresponding to an internal electric field $E_0 = -dU/dx$.


By forward biasing the diode with an applied electric field $E_a \geq E_0$ current begins flowing through the diode junction, electrons to the left and holes to the right.

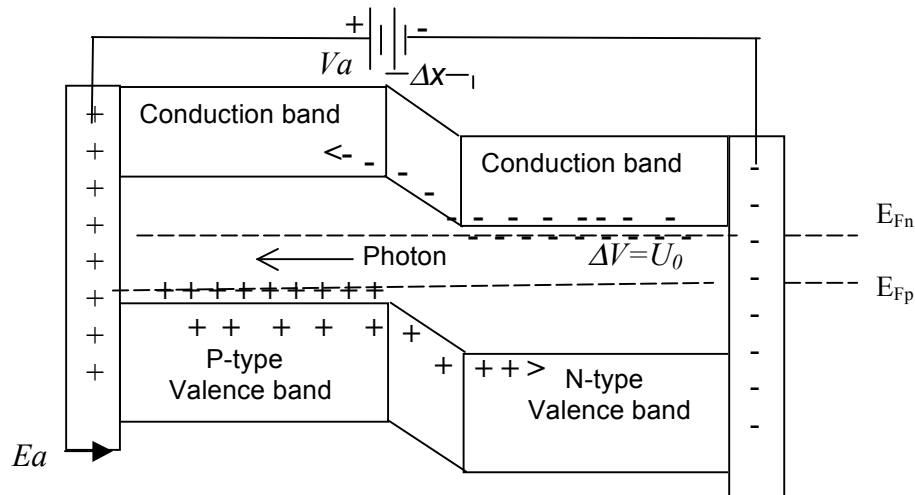


As the current flows electrons are continually meeting holes in the p-n interface. When an electron drops in to a hole level a photon is released with energy $E=hf$. The frequency or wavelength of light (color) will depend on the semiconductor material and diffusion voltage U_0 . The diode will turn on exactly when $V_a = U_0$. The energy lost in the electron-hole collision is converted to a photon of energy

$$hf = eU_0 = eV_a.$$

The LED junction must be thin and/or transparent so the light emission can escape.

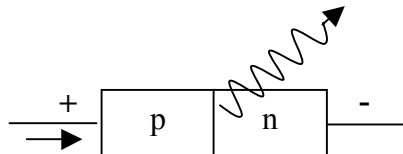

Apparatus: A variable voltage supply is placed in series with the diode and 100Ω **current limiting** resistor. A voltmeter V_a measures applied diode voltage and a 2nd voltmeter measures the voltage drop V_d across the 100Ω resistor.

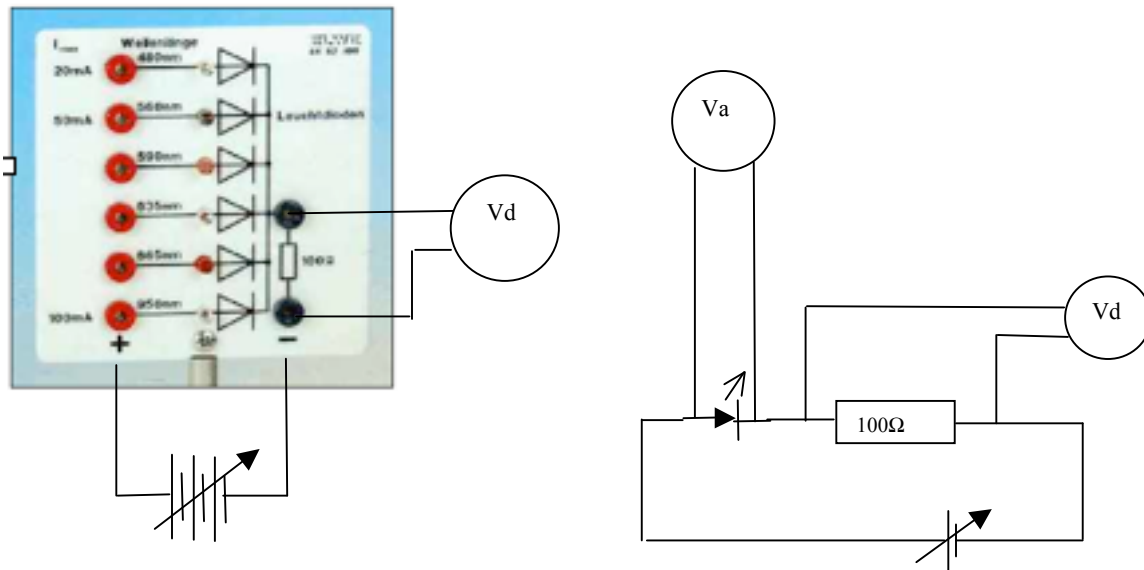

Part 1: LED I-V curve Attach the positive voltage terminal to the red LED. In small steps increase the the supply voltage $0 < V_a < 2V$ and measure the current flowing in the circuit $I = V_d/100$. Graph the I - V characteristic curve for the red LED. Determine the diffusion voltage U_0 or when the red LED just turns on ($I > 0$) from the graph. Determine an associated error.


V_a	0.	0.2	0.4	0.6	0.8	1.0	1.2	1.4	1.6	1.8	2.0
$I=V_d/100$	0.										

Part 2: Measurement of Planck's constant h . Attach the voltage supply to each LED in question and measure the diffusion voltage U_0 . Increase the voltage V_a until the LED just turns on or forward current $V_d/100 \sim 0$. Record the value of $V_a = U_0$ for each diode.

LED	465nm	560nm	585nm	635nm	660nm	950nm
U_0						

We must have that $eU_0 = hf$ to satisfy the resonance condition. Plot the data U_0 vs f . Fit the data to a straight line $y=a + bx$ or $U_0 = (h/e) x$. The slope= $b=h/e$ should give Planck's constant $h = eb!$ The fit and error can be determined by using the **LED_Calculator** given on the PHYS415 web page.

LED Data

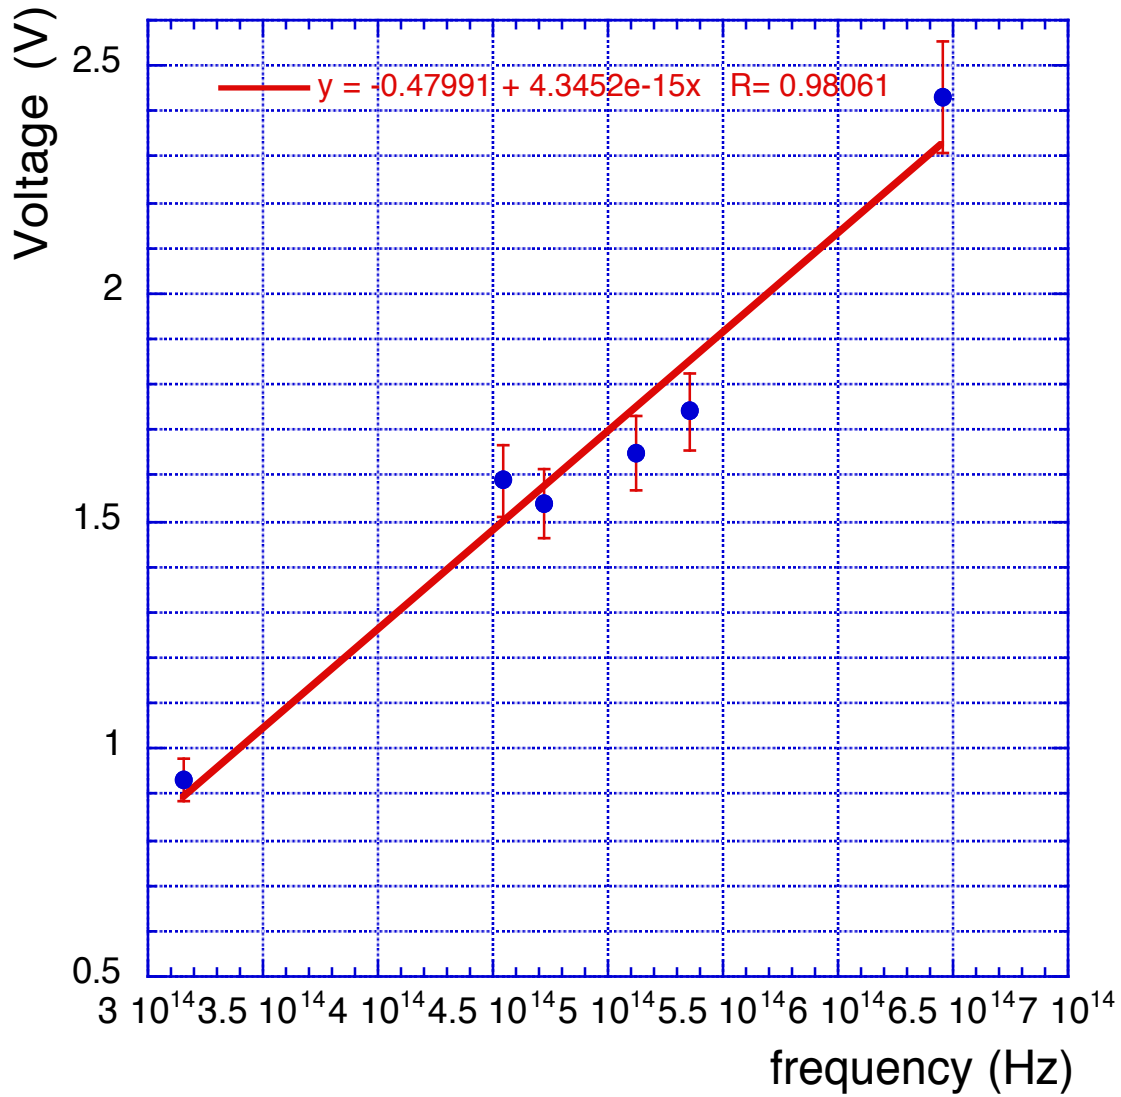

Wavelength (nm)	Voltage (V)	Frequency (Hz)
465.00	2.43	$6.4516e+14$
560.00	1.74	$5.3571e+14$
585.00	1.65	$5.1282e+14$
635.00	1.54	$4.7244e+14$
660.00	1.59	$4.5455e+14$
950.00	0.93	$3.1579e+14$